


9.1 Try to Write GP Log Data in Excel

[Action Example]

Write the alarm log data stored in SRAM of GP in an Excel file at 15:00 every day.

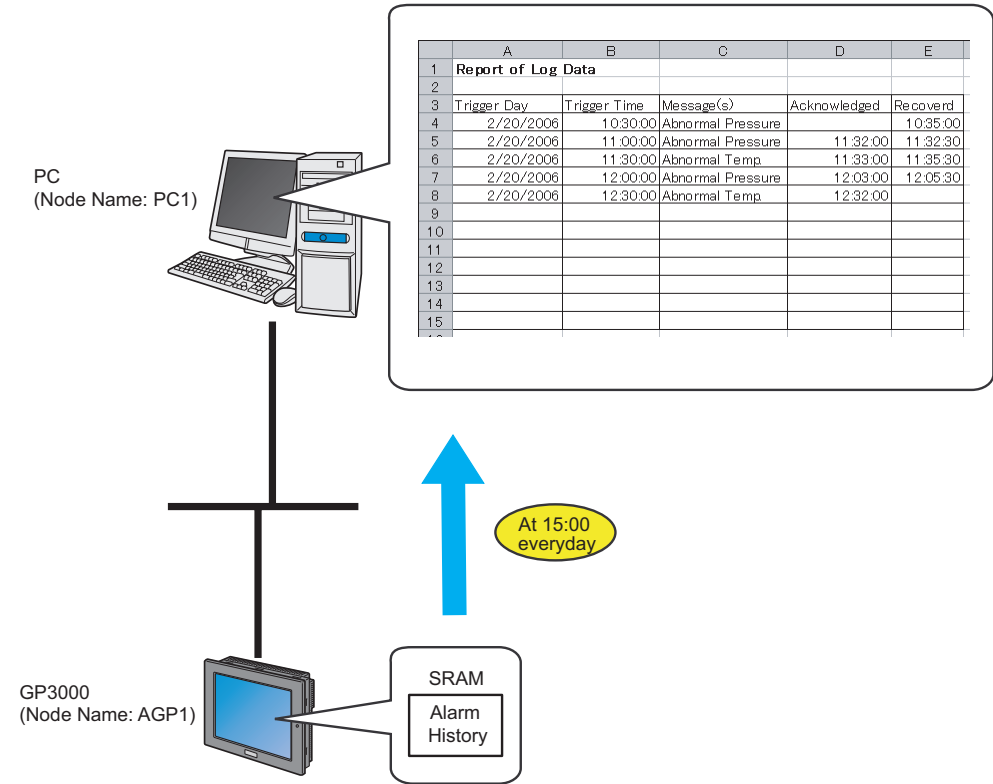


This section describes the setting procedures for executing the above action (ACTION) as an example.

NOTE

- Refer to the "GP-Pro Ex Reference Manual" for more details about alarms.

[Setting Procedure]

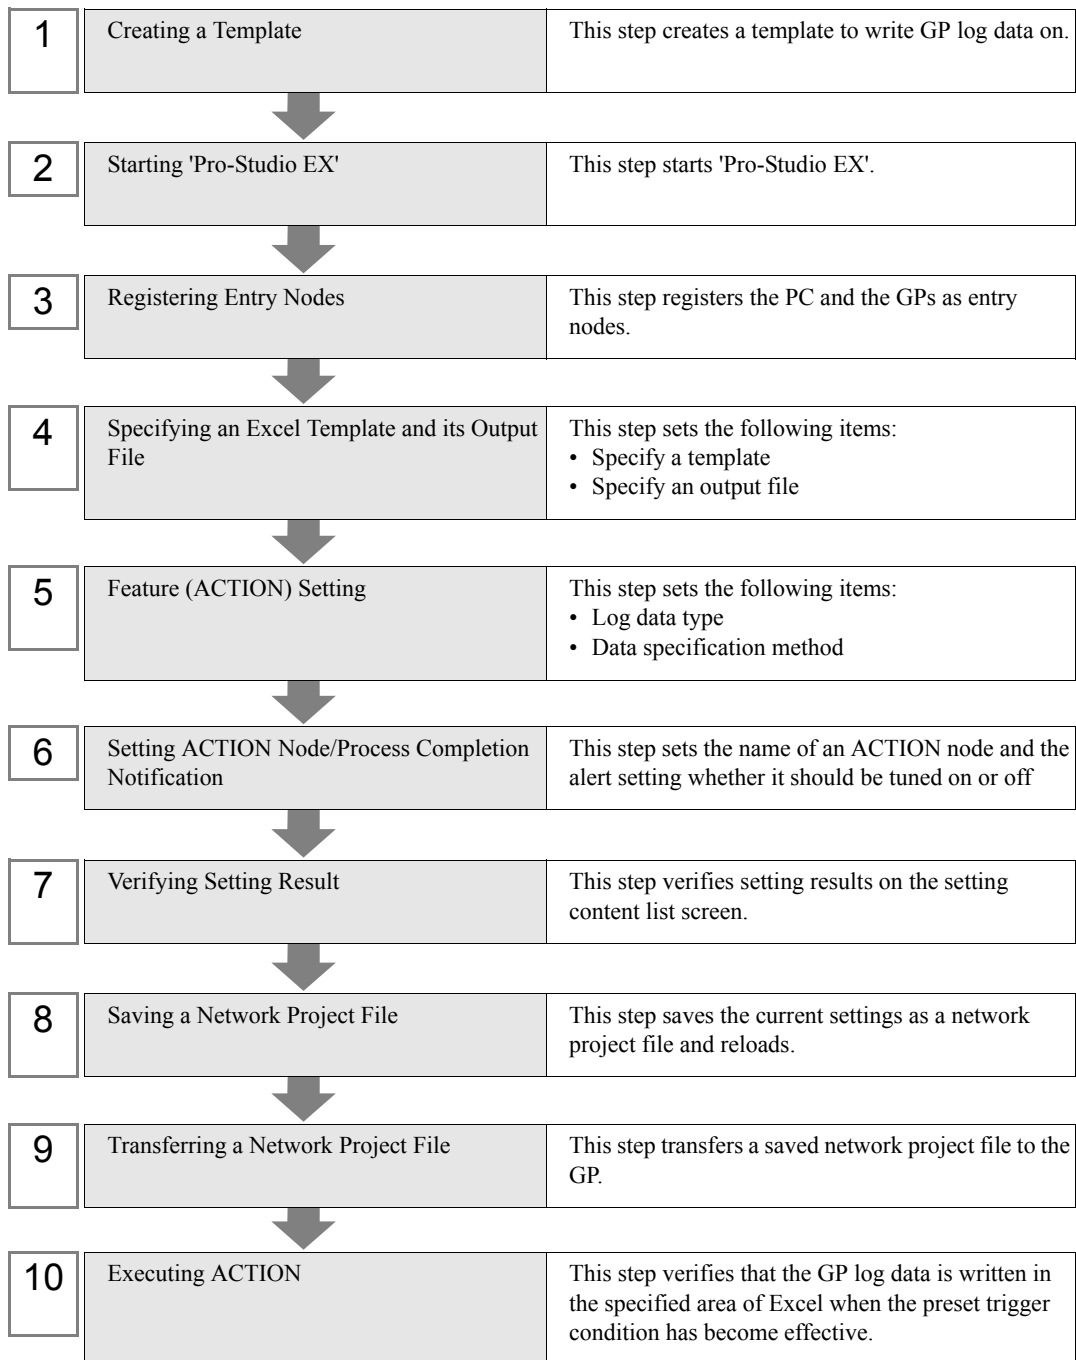

9.1.1 Creating a Template

This step creates a template to write GP log data on.

- 1 Start 'Microsoft Excel' and create the sheet below in Sheet 1.

When you execute ACTION, log data will be written in.

	A	B	C	D	E
1	Report of Log Data				
2					
3	Trigger Day	Trigger Time	Message(s)	Acknowledged	Recoverd
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

- 2 Save the file on PC desktop naming "template.xlt".

9.1.2 Starting 'Pro-Studio EX'


This step starts 'Pro-Studio EX'.
Refer to "3 Trial of Pro-Server EX" for details about starting method.

9.1.3 Registering Entry Nodes

This step registers the PC and the GP connected with network as nodes.
Refer to "29 Node Registration" for details about entry nodes.



Node Name :PC1
IP Address :192.168.0.1



Node Name :AGP1
IP Address :192.168.0.100
Device/PLC Information

Ex.

Entry node	Setting item	Setting example
PC	Node Name	PC1
	IP Address	192.168.0.1
GP	Type	GP3000 series
	Node Name	AGP1
	IP Address	192.168.0.100

9.1.4 Specifying an Excel Template and its Output Book


Specify the form template and output book created in (1).

Refer to "9.2 Setting Guide" for more details.


Ex.

Setting item		Setting content
Specify a Template	Template File	C:\Documents and Settings\Administrator\Desktop\template.xls
Output File	Folder Name	C:\Documents and Settings\Administrator\Desktop
	File Name	GP log data.xls
	Start with the output file displayed	Checked

- 1 Click the [Feature] icon on the status bar.

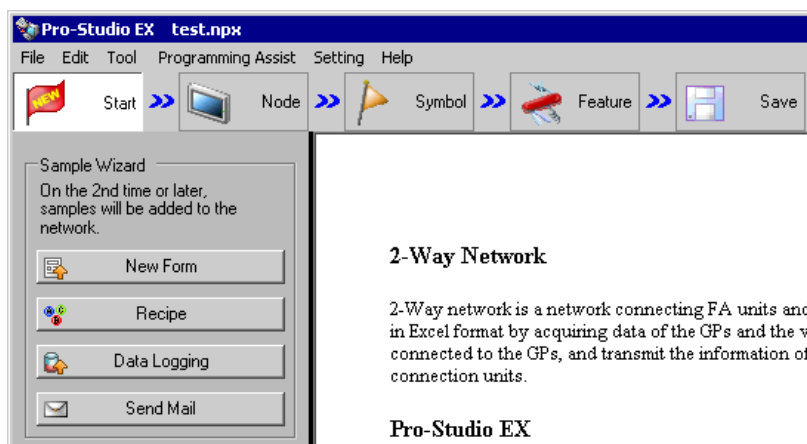


- 2 Select [ACTION] from the tree display on the left of the screen, then click the [Add] button.

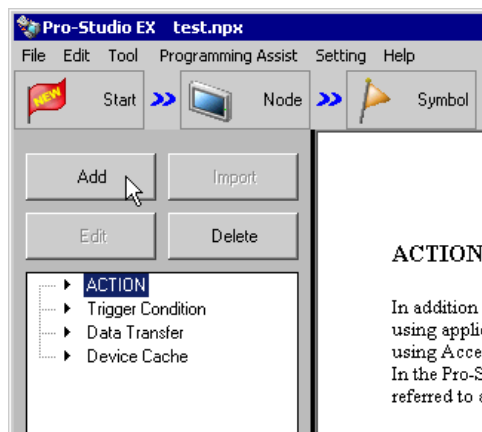


- 3 Click the [ACTION Type] list button, and select "Create form using EXCEL".

Then, enter the name of ACTION to set in the [ACTION name] field. In this example, enter "GP Log Data".

NOTE • [ACTION Name] can be an arbitrary name.

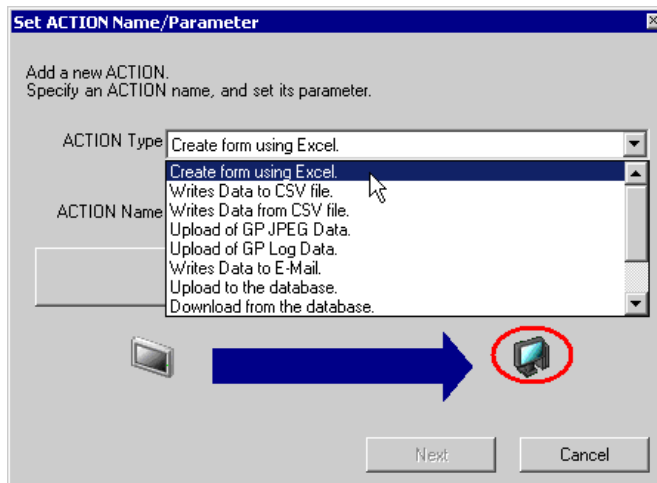

- 4 Click the [Click here to set ACTION parameter] button.

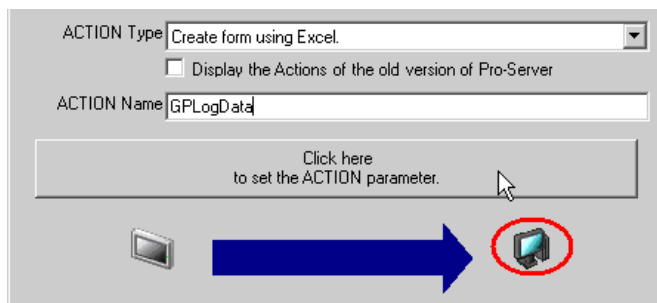

5 Make settings regarding an Excel template and its output file.

- 1) Click the [More] button of [Template file] to set the template file "template.xlt" which you created.

Create form using Excel Version 1.00

Template Designation
Please specify the name of Excel template file that is the source of forms.
When you use the wizard, the theme template file is copied to a file with this name.
When you create a new template, please specify the file name.

Template File: C:\Documents and Settings\Administrator\Desktop\exceltable Reference

Edit Template

Output File
The template file stores setting info. The actual output result will be displayed in the following file.

Folder Name: C:\Program Files\Pro-face\Pro-Server EX\WpxDatabase Reference

File Name: Report_%Y%M%D.xls Return to Default Settings

☒ Start from Displayed State

OK Cancel

- 2) Click the [More] button of [Folder Name] and specify "Desktop" as a folder to save the output file.

Output File
The template file stores setting info. The actual output result will be displayed in the following file.

Folder Name: C:\Documents and Settings\Administrator\Desktop Reference

File Name: Report_%Y%M%D.xls Return to Default Settings

☒ Start from Displayed State

OK Cancel

- 3) Set the file name "GP log data.xls" in the [File Name] field for the output file to set.

Output File
The template file stores setting info. The actual output result will be displayed in the following file.

Folder Name: C:\Documents and Settings\Administrator\Desktop Reference

File Name: GPlogdata.xls Return to Default Settings

☒ Start from Displayed State

OK Cancel

NOTE

- "%Y%M%D" is preset as "Year/Month/Date". For more details, refer to "35.1 Restrictions on Names".

- 4) Check the [Start with the output file displayed] check box.

Output File

The template file stores setting info. The actual output result will be displayed in the following file.

Folder Name

File Name

☒ Start from Displayed State

NOTE

- If you check [Start with the output file displayed], you can read/write data with an output file displayed. This is useful if you need to confirm data immediately.
-

9.1.5 Setting Content of an Excel Template

This step sets the content of the Excel template for writing log data in Excel.

The example below shows the setting of data write area (Log data area in GP) in a template.

Refer to "9.2 Setting Guide" for more details.


Target Cell Range

	A	B	C	D	E
1	Report of Log Data				
2					
3	Trigger Day	Trigger Time	Message(s)	Acknowledged	Recoverd
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

Ex.


Setting item	Setting content
Target Cell Range	A4 to E13
Entry Node	AGP1
Data Type	Block 1 Data
Alarm Type	Alarm History
Specification Method of File No.	Current Data (Data in SRAM)
Action when cell gets full	Clear and Overwrite
Trigger Condition	Specified Time (15:00)

- 1 Click the [Edit Template] button.

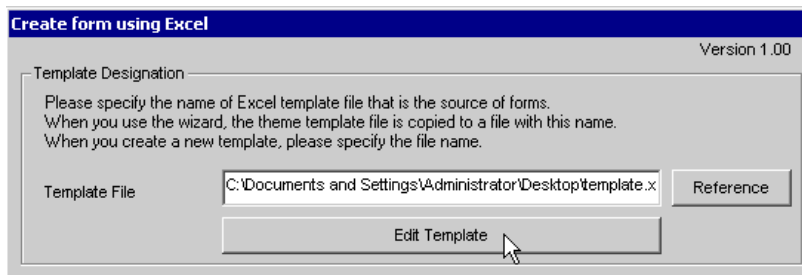


- 2 Set a data write area.


- 1) Click the [Log Data Area in GP] icon on Excel.

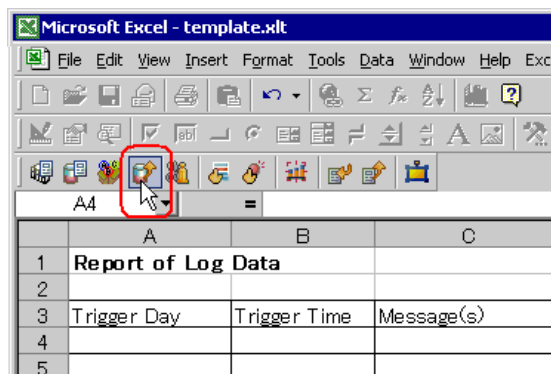


NOTE • Selecting [Log Data Area in GP] from [Excel ACTION] of the menu displays the same screen.

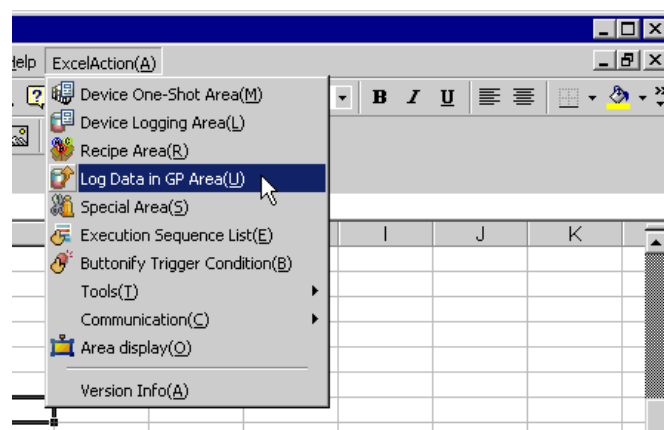


- 2) Click the cell range specify button of [Target Cell Range].

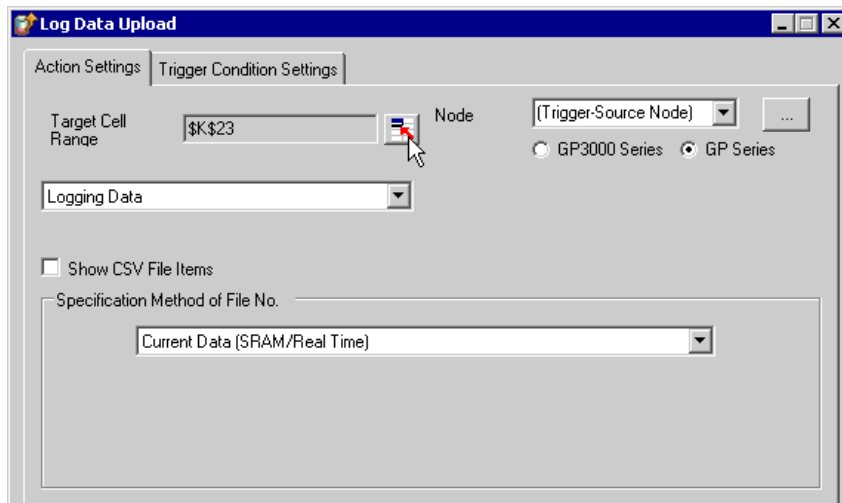


- 3) Drag the mouse to specify the area to use for data logging (cells A4 to E15). Then click the [OK] button.

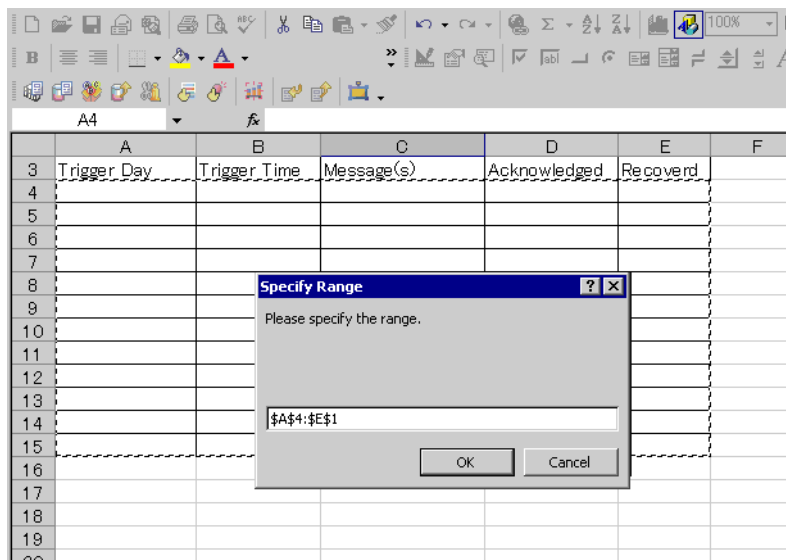


- 4) Click the list button of [Entry Node] and select "AGP1" as a data transfer source node.

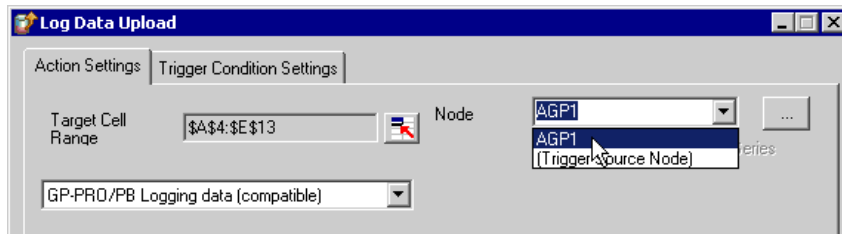


- 5) Select "Alarm Block 1 Data" for the data type and "Alarm History" for the alarm type.

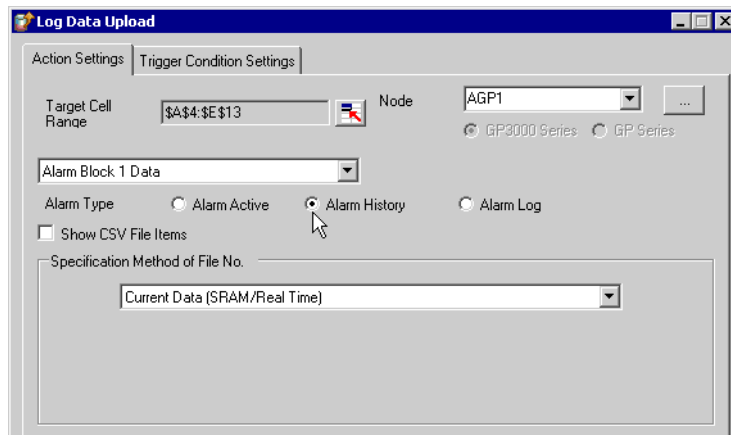

- 6) Select "Current Data (Data in SRAM)" in [Specification Method of File No.].

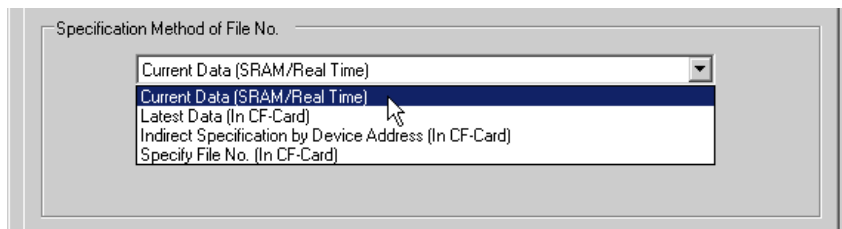


- 7) Select "Clear and Overwrite" in [Action when cell gets full].

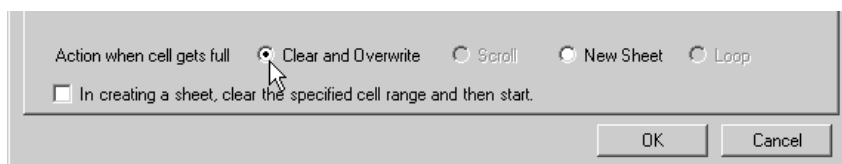


3 Set trigger conditions.


- 1) Click the [Trigger Condition Settings] tab.

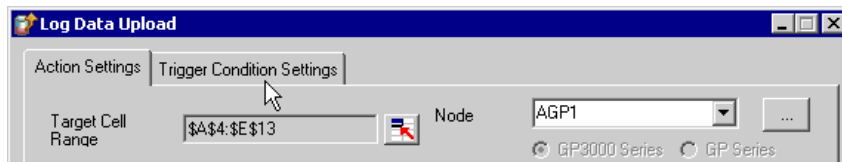

The "Trigger Condition Settings" screen will appear.

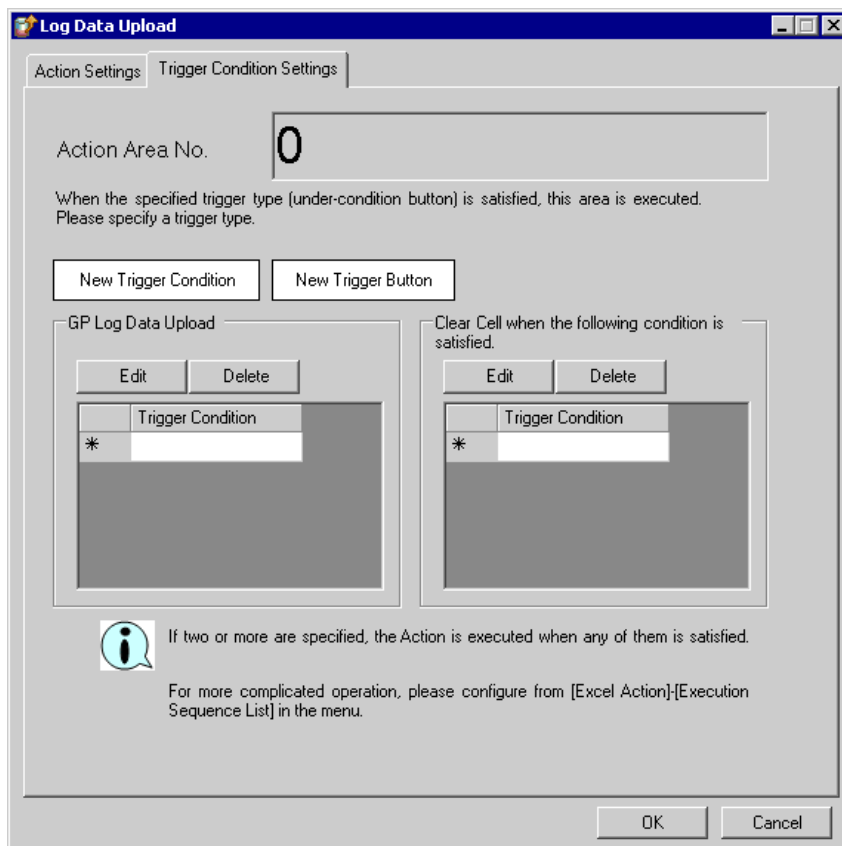

- 2) Click the [New Trigger Condition] button.

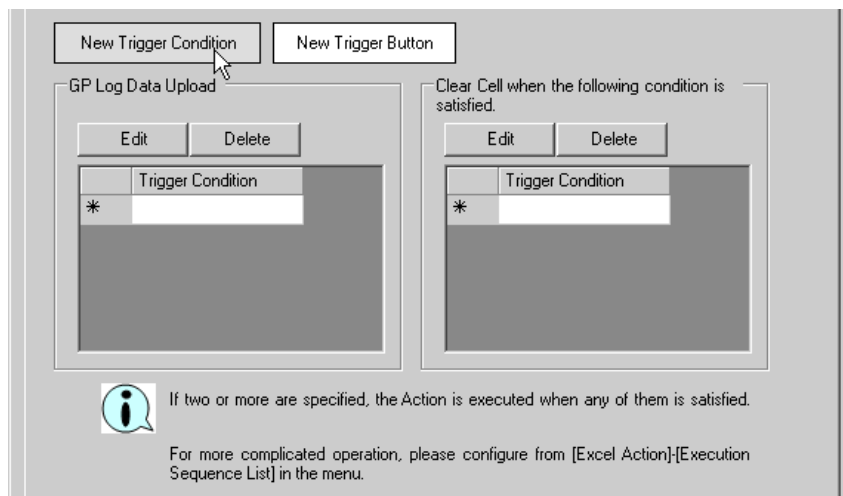


NOTE

- You can create a button on the Excel sheet, and use this as a trigger condition to execute ACTION. Refer to "5.6 Creating Trigger Buttons in a Form" for details.


	A	B	C	D	E	F	G	H
1	Report of Log Data							
2								
3	Trigger Day	Trigger Time	Message(s)	Acknowledged	Recoverd			
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								

Excel Form Action


- 3) Click the [New Trigger Condition] button.

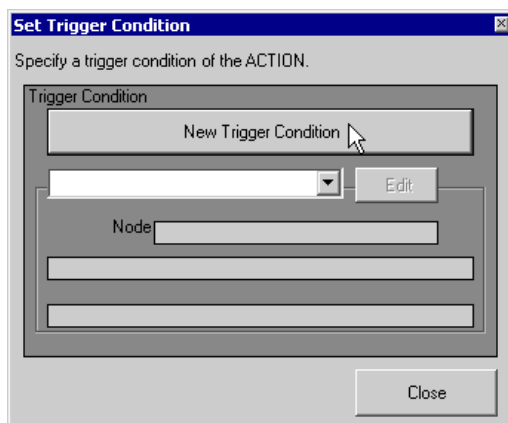


- 4) Enter the trigger condition name "Read GP log data" in [Trigger Condition Name], and select "AGP1" in [Node Name] as a name of the data transfer source.

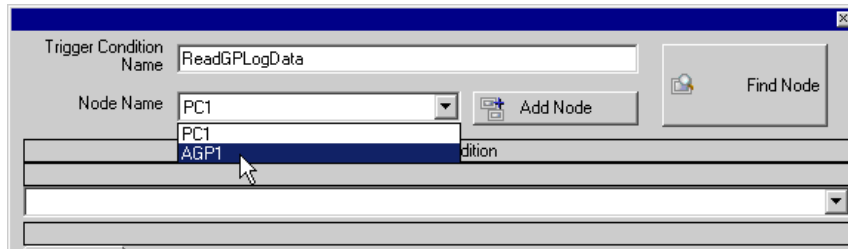


- 5) Click the [Specified Time] button in the [Condition 1] tab, and enter "15" and "0" in [Specified Time]. Then click the [OK] button.

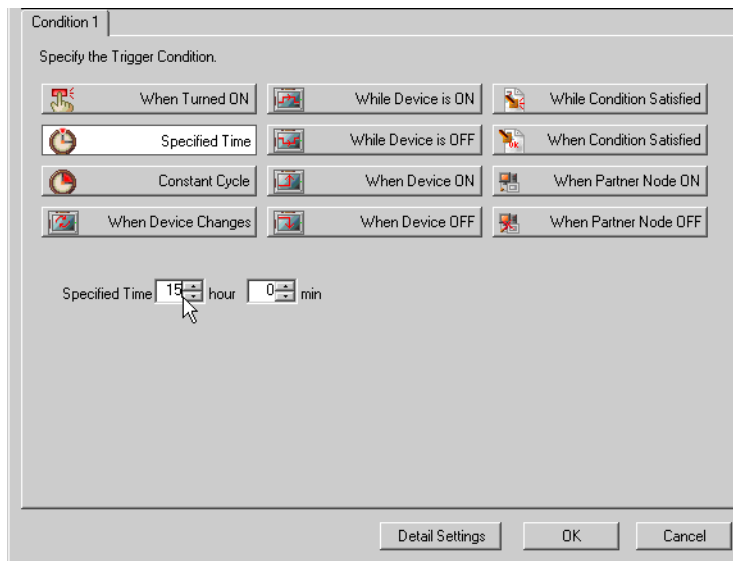

- 6) Click the [Close] button.

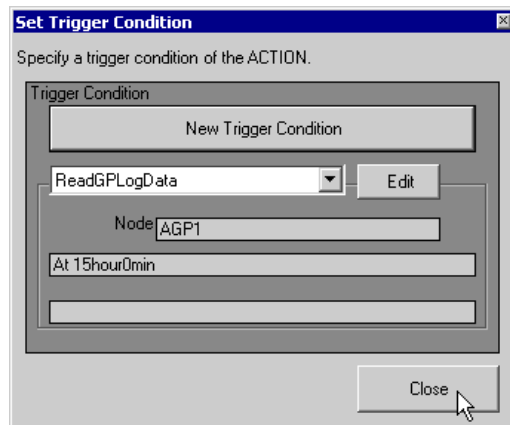


- 7) In [Logging], click the blank line of [Trigger Condition] and select "Read GP log data" as a trigger condition.

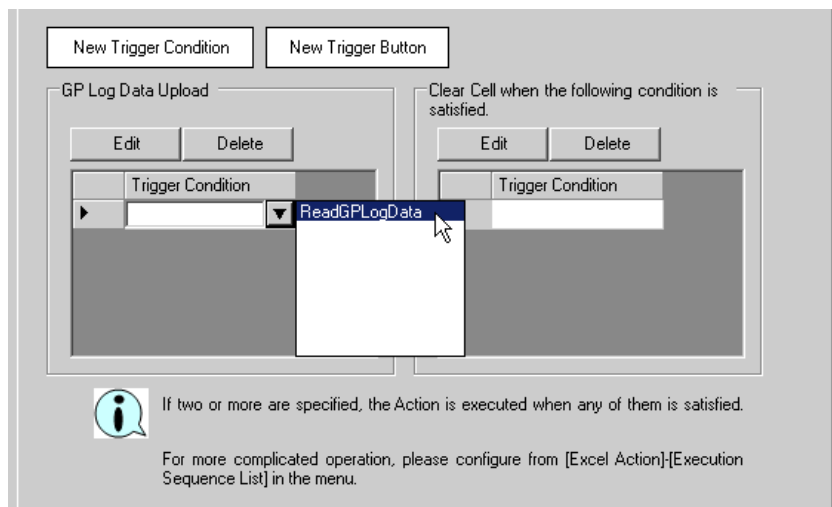


- 8) Click the [OK] button.

This is the end of the content settings of an Excel template.


4 Close 'Excel'.

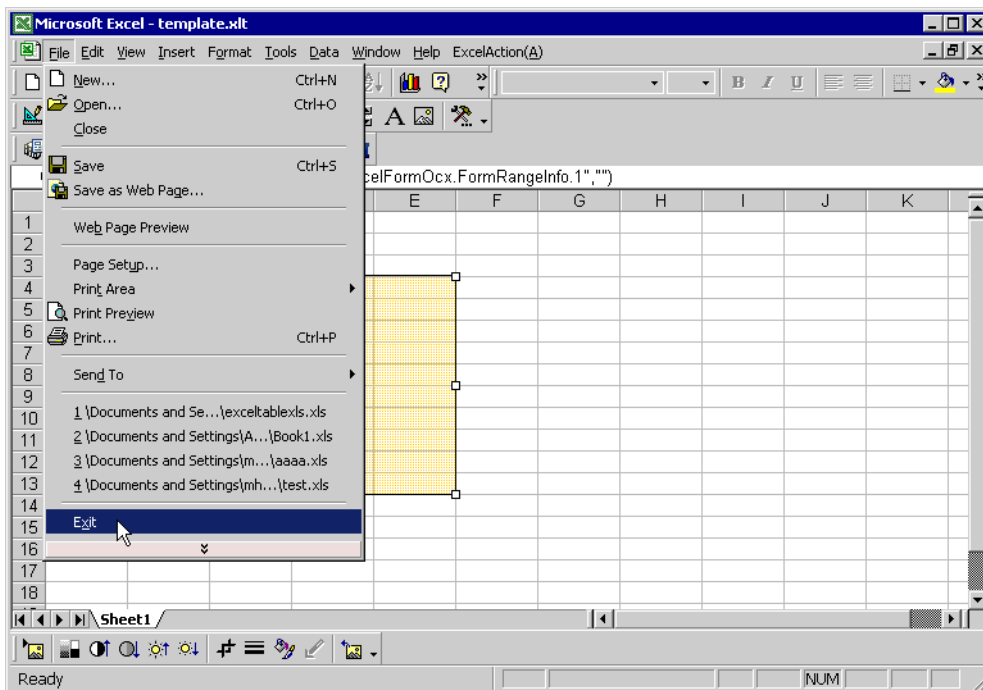

The following dialog box will appear, asking you if you want to save changes before closing. Click the [Yes] button.

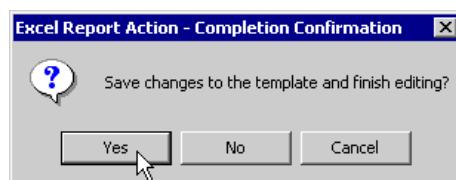

5 On the "Create a Form Using Excel" screen, click the [OK] button.

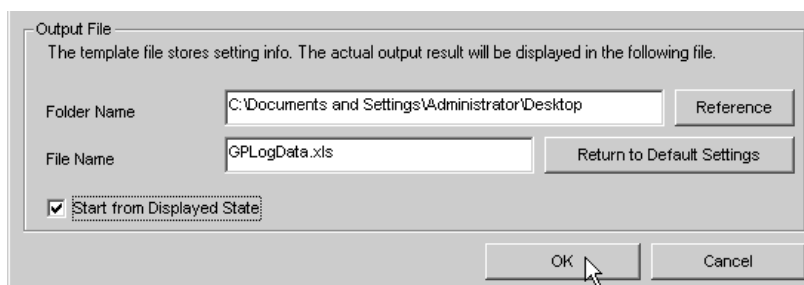


9.1.6 Setting ACTION Node/Process Completion Notification

This step sets the name of an ACTION node and the alert setting whether it should be tuned on or off when the ACTION is completed.


Ex.

- ACTION Node : PC1
- Receive Notification: OFF

1 On the "ACTION Name/Parameter Settings" screen, click the[Next] button.

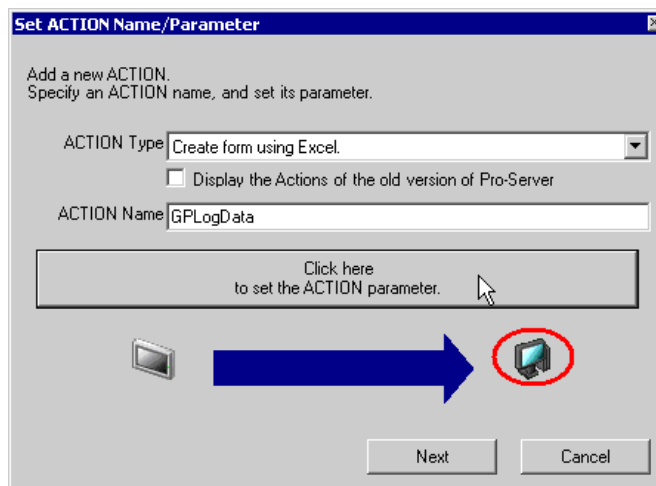

2 Click the list button of [Action Node] and select "PC1" as a node where ACTION operates.

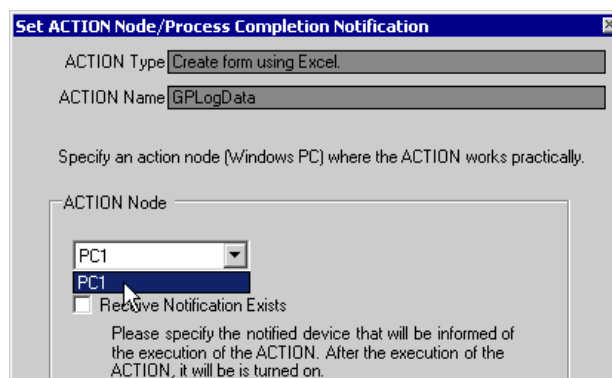

- 3 Turn off the check box of [Receive Notification Exists], if checked.

NOTE • Do not set "Receive Notification".

- 4 Click the [End] button.

The "ACTION Node/Process Completion Notification Settings" screen will disappear. On the left of the screen, the name of ACTION you set will appear.

This is the end of the settings of the ACTION node and process completion notification.


9.1.7 Verifying Setting Result

This step verifies setting results on the setting content list screen.


NOTE

- In case of the "Excel Report" ACTION, you cannot add, edit or delete trigger conditions from "Trigger Condition/Process List per ACTION". To change the settings, click the [Parameters Settings] button and change the settings in [Edit Template] on Excel.


- 1 Select the ACTION name "GP Log Data" from the tree display on the left of the screen.

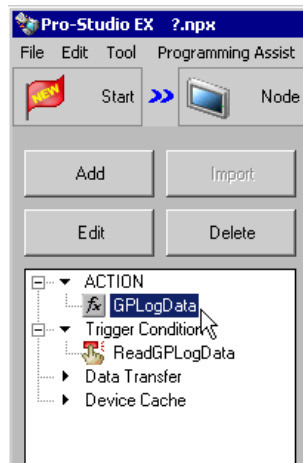


Confirm that the setting content appears on the right of the screen.

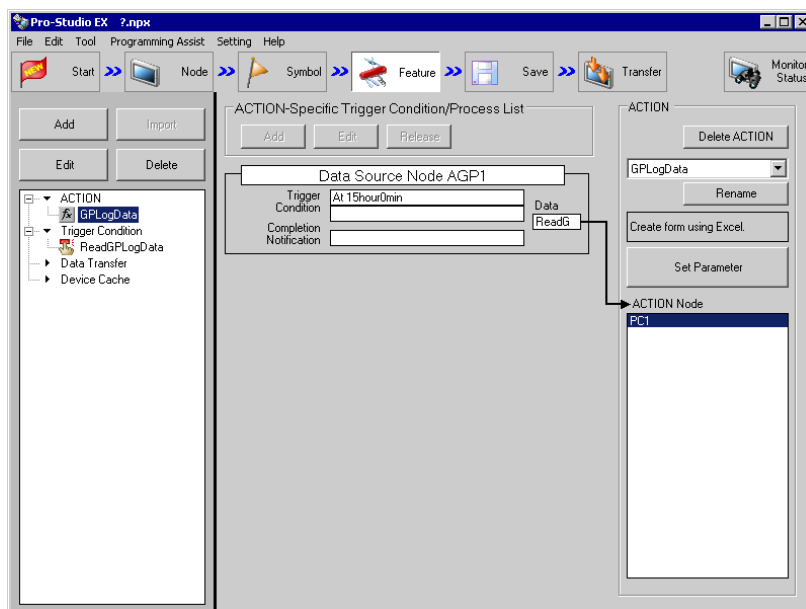

- 2 Select the trigger condition name "Read GP log data" from the tree display on the left of the screen.

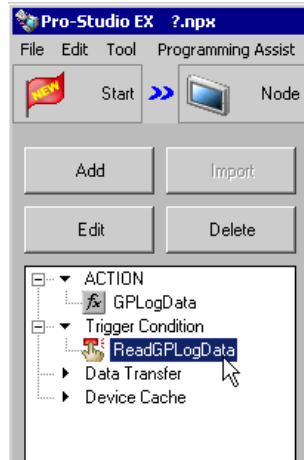

Confirm that the setting content appears on the right of the screen.

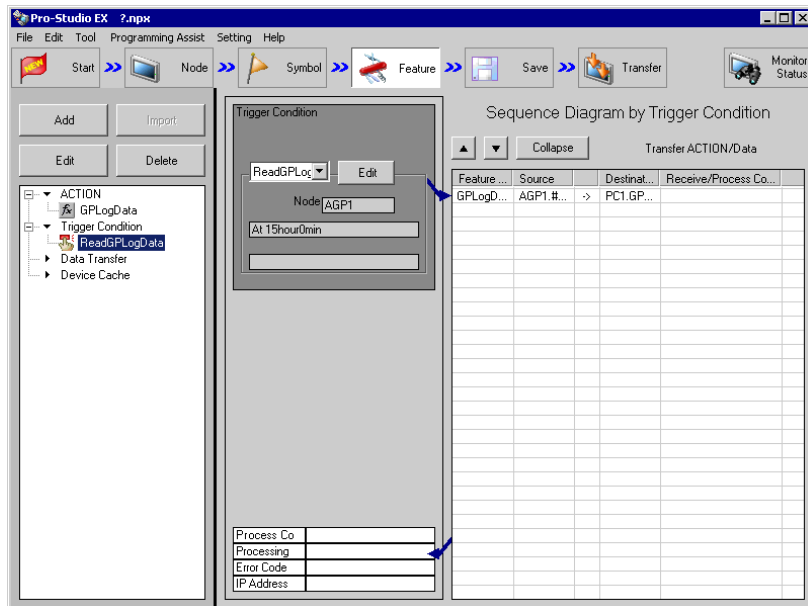

This is the end of the verification of the settings.

9.1.8 Saving a Network Project File

This step saves the current settings as a network project file and reloads to 'Pro-Server EX'.

Refer to "24 Saving" for details about saving a network project file.

IMPORTANT

- "Pro-Server EX" reads a created network project file, and then executes ACTION according to the settings in the file. The settings therefore need be saved in the network project file.
- Be sure to reload the network project file to 'Pro-Server EX'. If not, ACTION will not work.

Ex.

- Path of network project file : Desktop\monitor.npx
- Title : EXCEL Report ACTION

9.1.9 Test Read

You can check if the settings are correct before transferring a created network project file to entry nodes.

When executing ACTION, the setting data is output to an output file. However, when executing a test read, it is reflected in a template file.

NOTE


- You do not necessarily have to perform a test read.
If you skip this, proceed to "9.1.10 Transferring a Network Project File".

IMPORTANT

- To perform a test read, it is necessary that 'Pro-Server EX', to which a created network project file has been loaded, is running.

- 1 Click the [Feature] button.
- 2 Click "Excel Report ACTION" from the tree display on the left of the screen, then click the [Edit] button.
- 3 On the "ACTION Name/Parameter Settings" screen, click the [Click here to set ACTION parameter] button.
- 4 On the "Create a Form Using Excel" screen, click the [Edit Template] button.

5 With the ACTION area selected, click the [Test Read] icon.

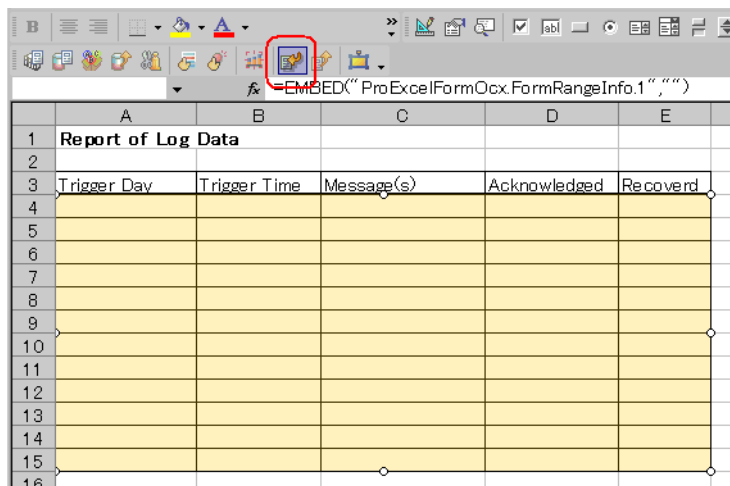

The setup contents will be read in the template.

NOTE • Refer to "9.3 Restrictions" for details about the restrictions on test reads.

9.1.10 Transferring a Network Project File

This step loads a saved network project file to 'Pro-Server EX' and then transfers to entry nodes.

Refer to "25 Transferring" for details about transferring a network project file.

NOTE • Be sure to transfer a network project file. If not, ACTION will not work.

9.1.11 Executing ACTION

This step verifies that enabling a trigger condition activates ACTION, opens an Excel book (file name: "GP error log.xls"), and then writes the GP log data in the specified location in Excel.

	A	B	C	D	E
1	Report of Log Data				
2					
3	Trigger Day	Trigger Time	Message(s)	Acknowledged	Recoverd
4	2/20/2006	10:30:00	Abnormal Pressure		10:35:00
5	2/20/2006	11:00:00	Abnormal Pressure	11:32:00	11:32:30
6	2/20/2006	11:30:00	Abnormal Temp.	11:33:00	11:35:30
7	2/20/2006	12:00:00	Abnormal Pressure	12:03:00	12:05:30
8	2/20/2006	12:30:00	Abnormal Temp.	12:32:00	
9					
10					
11					
12					
13					
14					
15					

NOTE

- If error occurs, you can check the log in the Log Viewer. For more details, refer to "27.5 Monitoring System Event Logs".

This is the end of the explanation of this ACTION.